




UNV®
Uniview Technologies

CATÁLOGO



UACB112F28

Cámara Bullet 2MP 2.8MM DWDR IR 20M IP67 UAC-B112-F28

CARACTERÍSTICAS:

- 2MP
- TVI/AHD/CVI/CVBS
- IR-cut filter with auto switch (ICR)
- Supports 180° horizontal flip, 180° vertical flip
- OSD configuration menu, easy to operate
- IP67 waterproof and dustproof design, high reliability
- OSD configuration menu in 11 languages

UACT112F28

Cámara Domo 2MP 2.8MM DWDR IR 20M IP67 UAC-T112-F28

CARACTERÍSTICAS:

- 2MP high quality image
- TVI/AHD/CVI/CVBS
- IR-cut filter with auto switch (ICR)
- Supports 180° horizontal flip, 180° vertical flip
- OSD configuration menu, easy to operate
- IP67 waterproof and dustproof design, high reliability
- OSD configuration menu in 11 languages



UAC-B112-W

Cámara Bullet Análogo Color Hunter 2MP 2.8MM UAC-B112-WF28-W



CARACTERÍSTICAS:

- 2MP high quality image
- TVI/AHD/CVI/CVBS
- Supports white light illumination, 24/7 color images
- Supports 180° horizontal flip, 180° vertical flip
- OSD configuration menu, easy to operate
- IP67 waterproof and dustproof design, high reliability
- OSD configuration menu in 11 languages



UAC-T122-W

Cámara Domo Color Hunter 2.8MM UAC-T122-AF28M-W

CARACTERÍSTICAS:

- 2MP high quality imaging
- TVI/AHD/CVI/CVBS
- Supports white light illumination, 24/7 color images
- Supports 180° horizontal flip, 180° vertical flip
- OSD configuration menu, easy to operate
- IP67 waterproof and dustproof design, high reliability
- OSD configuration menu in 11 languages
- Built-in microphone

UAC-B115-F28-W

Cámara Bullet Análoga Color Hunter 5MP 2.8MM UAC-B115-F28-W

CARACTERÍSTICAS:

- 5MP high quality image
- TVI/AHD/CVI/CVBS
- Supports white light illumination, 24/7 color images
- Supports 180° horizontal flip, 180° vertical flip
- OSD configuration menu, easy to operate
- IP67 waterproof and dustproof design, high reliability
- OSD configuration menu in 11 language



UAC-T115-F28-W

Cámara Domo 5MP Color Hunter 2.8MM UAC-T115-F28-W

CARACTERÍSTICAS:

- 5MP high quality image
- TVI/AHD/CVI/CVBS
- Supports white light illumination, 24/7 color images
- Supports 180° horizontal flip, 180° vertical flip
- OSD configuration menu, easy to operate
- IP67 waterproof and dustproof design, high reliability
- OSD configuration menu in 11 languages



UAC-B115-A-W

Cámara Bullet Análoga Color Hunter 5MP 2.8MM UAC-B115-AF28-W



CARACTERÍSTICAS:

- 5MP high quality image
- TVI/AHD/CVI/CVBS
- Supports white light illumination, 24/7 color images
- Supports 180° horizontal flip, 180° vertical flip
- OSD configuration menu, easy to operate
- IP67 waterproof and dustproof design, high reliability
- Built-in microphone

UAC-T115-A-W

Cámara Domo 5MP Color Hunter 2.8MM UAC-T115-AF28-W



CARACTERÍSTICAS:

- 5MP high quality image
- TVI/AHD/CVI/CVBS
- Supports white light illumination, 24/7 color images
- Supports 180° horizontal flip, 180° vertical flip
- OSD configuration menu, easy to operate
- IP67 waterproof and dustproof design, high reliability
- Built-in microphone

UAC-P112-W

Cámara PTZ Análoga Color Hunter 2MP 2.8MM UAC-B115-AF28-W



CARACTERÍSTICAS:

- 2MP high quality imaging
- TVI/AHD/CVI/CVBS
- Supports white light illumination, 24/7 color images
- Supports 180° horizontal flip, 180° vertical flip
- OSD configuration menu, easy to operate
- IP66 waterproof and dustproof design, high reliability
- Built-in microphone
- Supports 0 to 345° pan range, 0 to 90° tilt range
- Supports digital defog



UAC-B122-AF28LM

Cámara Bullet Análoga IR Light hunter 2MP 2.8MM UAC-B122-AF28LM

CARACTERÍSTICAS:

- High quality imaging with 2MP resolution TVI/AHD/CVI/CVBS
- Supports IR-cut filter with auto-switch (ICR)
- LightHunter monitoring with high-sensitivity sensor
- 3D noise reduction technology delivers clean and sharp images
- Supports 180° horizontal flip, 180° vertical flip
- IP67
- Built-in microphone

UAC-B125-W

Cámara Bullet 5MP Color Hunter 2.8MM UAC-B125-AF28M-W

CARACTERÍSTICAS:

- 5MP high quality imaging TVI/AHD/CVI/CVBS
- Supports white light illumination, 24/7 color images
- Supports 180° horizontal flip, 180° vertical flip
- IP67 waterproof and dustproof design, high reliability
- Built-in microphone
- Metal front face and housing



UAC-T125-AF28M-W

Cámara Domo 5MP Color Hunter 2.8MM UAC-T125-AF28M-W

CARACTERÍSTICAS:

- 5MP high quality imaging TVI/AHD/CVI/CVBS
- Supports white light illumination, 24/7 color images
- Supports 180° horizontal flip, 180° vertical flip
- IP67
- Built-in microphone
- Metal front face and housing



XVR30104G3

XVR 4 canales 1HDD VGA/HDMI 5MP XVR301-04G3



CARACTERÍSTICAS:

- Support H.265/H.264 video formats
- Support audio over coaxial cable
- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
- 4-channel BNC input
- Support 1-ch HDMI output, 1-ch VGA output at up to 1920*1080
- Long transmission distance over coaxial cable
- Support mainstream cameras of ONVIF and RTSP protocols

XVR30108G3

XVR 8 canales 1HDD VGA/HDMI 5MP XVR301-08G3


CARACTERÍSTICAS:

- Support H.265/H.264 video formats
- Support audio over coaxial cable
- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
- 8 channel BNC input
- Support 1-ch HDMI output, 1-ch VGA output at up to 1920*1080
- Long transmission distance over coaxial cable
- Support mainstream cameras of ONVIF and RTSP protocols



XVR30108Q3

XVR 8 canales 1HDD VGA/HDMI 5MP XVR301-08Q3



CARACTERÍSTICAS:

- Support H.265/H.264 video formats*
- Support audio over coaxial cable*
- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access*
- 4/8-channel BNC input*
- Support 1-ch HDMI output, 1-ch VGA output at up to 1920*1080*
- Long transmission distance over coaxial cable*



XVR301-08F

XVR 8 canales 1HDD VGA/HDMI 2MP XVR301-08F

CARACTERÍSTICAS:

- Support H.265/H.264 video formats
- Support audio over coaxial cable
- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
- 8-channel BNC input
- Support 1-ch HDMI output, 1-ch VGA output at up to 1920*1080
- Long transmission distance over coaxial cable
- Support mainstream cameras of ONVIF and RTSP protocols

XVR30116G3

XVR 16 canales 1HDD VGA/HDMI 5MP XVR301-16G3

CARACTERÍSTICAS:

- Support H.265/H.264 video formats
- Support audio over coaxial cable
- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
- 8 channel BNC input
- Support 1-ch HDMI output, 1-ch VGA output at up to 1920*1080
- Long transmission distance over coaxial cable
- Support mainstream cameras of ONVIF and RTSP protocols



The background of the entire advertisement is a scenic photograph of a coastal landscape. A person is paragliding with a large red canopy against a clear blue sky. Below, a sandy beach meets the ocean with gentle waves. In the foreground on the right, there are steep, reddish-brown cliffs overlooking the sea. The overall atmosphere is bright and expansive.

Unlimited

Unview Brand new vision

View New

Rooted deeply into scenes with solutions applied to thousands of industries, Unview continuously innovates AIoT digital intelligence product technology, to unlock the unlimited smart and connective city and life.



IPC322LB

Cámara IP Domo 2MP 2.8MM IPC322LB-DSF28K-G

CARACTERÍSTICAS:

- 2MP (1920*1080) @30/25fps; 720P (1280*720) @30/25fps
- 1/2.7" CMOS sensor
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR technology enables clear image in strong light scene
- Support 9:16 Corridor Mode
- Supports 128 G Micro SD card
- IP67 protection / IK10 vandal resistant
- Support PoE power supply

IPC323LBSF28

Cámara IP Domo 3MP 2.8MM IPC323LB-SF28-A1

CARACTERÍSTICAS:

- High quality image with 3MP, 1/2.8" CMOS sensor
- 3MP (2304*1296) @20fps; 2MP (1920*1080) @30/25fps; 720P (1280*720) @30/25fps
- Ultra 265, H.265, H.264
- Smart IR, up to 30m (98ft) IR distance
- IK10 vandal resistant
- IP67 protection
- Support PoE power supply
- 2-Axis



IPC2122LB

Cámara IP Bullet 2MP 2.8MM IPC2122LB-ADF28KM-G

CARACTERÍSTICAS:

- High quality image with 2MP, 1/2.7" CMOS sensor
- 2MP (1920*1080) @30/25fps; 720P (1280*720) @30/25fps
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR technology enables clear image in strong light scene
- Support 9:16 Corridor Mode
- Built-in Mic
- Smart IR, up to 30m (98ft) IR distance
- Supports 128 G Micro SD card
- Support PoE power supply



IPC2123LBSF28

Cámara IP Bullet 3MP 2.8MM IPC2123LB-SF28-A1

CARACTERÍSTICAS:

- High quality image with 3MP, 1/2.8" CMOS sensor
- 3MP (2304*1296)@20fps; 2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
- Ultra 265, H.265, H.264
- Smart IR, up to 30m (98ft) IR distance
- IP67 protection
- Support PoE power supply
- 3-Axis

IPC2122LE-WL

Cámara IP Bullet 2MP COLOR HUNTER 2,8MM IPC2122LE-ADF28KMC-WL

CARACTERÍSTICAS:

- High quality image with 2MP, 1/2.8" CMOS sensor
- Ultra 265, H.265, H.264, MJPEG
- Built-in Mic & Speaker
- Smart IR, up to 30m (98ft) IR distance
- White Light, up to 30m (98ft) white light distance
- Supports 128 G Micro SD card
- IP67 protection



IPC2124LE-WL

Cámara IP Bullet 4MP COLOR HUNTER 2,8MM IPC2124LE-ADF28KMC-WL

CARACTERÍSTICAS:

- High quality image with 4MP, 1/3" CMOS sensor
- Ultra 265, H.265, H.264, MJPEG
- Built-in Mic & Speaker
- Smart IR, up to 30m (98ft) IR distance
- White Light, up to 30m (98ft) white light distance
- Supports 128 G Micro SD card
- IP67 protection
- Support PoE power supply





IPC2325LB-G

Cámara IP Bullet 5MP 2,8MM-12MM IPC2325LB-ADZK-G

CARACTERÍSTICAS:

- High quality image with 5MP, 1/2.7" CMOS sensor
- Ultra 265, H.265, H.264, MJPEG
- Support 9:16 Corridor Mode
- Built-in Mic
- Smart IR, up to 50m (164ft) IR distance
- Supports 256 G Micro SD card
- IP67 protection
- Support PoE power supply

IPC325LE-G

Cámara Ip Domo 5MP 2,8MM IPC325LE-ADF28K-G

CARACTERÍSTICAS:

- High quality image with 5MP, 1/2.7" CMOS sensor
- Ultra 265, H.265, H.264, MJPEG
- Built-in Mic
- Smart IR, up to 30m (98ft) IR distance
- Supports 256 G Micro SD card
- Support PoE power supply



IPC3612LE-WL

Cámara IP Domo 2MP COLOR HUNTER 2,8MM IPC3612LE-ADF28KC-WL



CARACTERÍSTICAS:

- High quality image with 2MP, 1/2.8" CMOS sensor
- Ultra 265, H.265, H.264, MJPEG
- Built-in Mic & Speaker
- Smart IR, up to 30m (98ft) IR distance
- White Light, up to 30m (98ft) white light distance
- Supports 128 G Micro SD card
- IP67 protection
- Support PoE power supply



IPC3614LE-WL

Cámara IP Domo 4MP COLOR HUNTER 2,8MM IPC3614LE-ADF28KC-WL

CARACTERÍSTICAS:

- High quality image with 4MP, 1/3" CMOS sensor
- Ultra 265, H.265, H.264, MJPEG
- Built-in Mic & Speaker
- Smart IR, up to 30m (98ft) IR distance
- White Light, up to 30m (98ft) white light distance
- Supports 128 G Micro SD card
- IP67 protection
- Support PoE power supply

IPC2128ADF28K

Cámara IP Bullet 8MP IPC2128SB-ADF28KMC-10

CARACTERÍSTICAS:

- 8MP
- Ultra 265, H.265, H.264, MJPEG
- Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection
- 120dB true WDR
- Built-in Mic
- Built-in Speaker
- Smart IR, up to 30m (98ft) IR distance
- Supports 256 G Micro SD card
- IP67 protection



IPC6312LR-AX4W-VG

Mini PTZ IP WI-FI 2MP 2.8~12mm IPC6312LR-AX4W-VG

CARACTERÍSTICAS:

- 2MP
- Ultra 265, H.265, H.264, MJPEG
- Smart intrusion prevention, Cross Line, Intrusion, Enter Area, Leave Area
- Up to 120 dB Optical WDR (Wide Dynamic Range)
- Wi-Fi connection and easy installation
- Built-in Mic & Speaker
- Smart IR, Up to 50 m (164 ft) IR distance
- Micro SD, up to 256GB
- IP66 protection





IPC6412LR-X16-VG

PTZ IP 2MP 5 - 80mm IPC6412LR-X16-VG

CARACTERÍSTICAS:

- 2MP
- Ultra 265, H.265, H.264, MJPEG
- 16X optical zoom
- LightHunter technology
- Smart IR, up to 100m (328ft) IR distance
- Micro SD, up to 256GB
- DC 12V±25% or PoE+ (IEEE 802.3at)
- IP66 ingress protection

IPC6424SR-X25-VF

Cámara PTZ 4MP 4,8MM-120MM IPC6424SR-X25-VF

CARACTERÍSTICAS:

- Ultra 265, H.265, H.264, MJPEG
- 25X Optical Zoom
- Smart intrusion prevention, Cross Line,Others
- Smart IR, up to 100m (328ft) IR distance
- DC 12V±25% or PoE+ (IEEE 802.3at)
- IP67 ingress protection
- IK10 vandal resistant



IPC675LFW-VG

Mini PTZ Disuacion Activa 5 MP 2.8-12MM IPC675LFW-AX4DUPKC-VG

CARACTERÍSTICAS:

- High quality image with 5MP, 1/2.7" CMOS sensor
- Ultra 265, H.265, H.264, MJPEG
- Smart intrusion prevention, support false alarm filtering, others
- Up to 120 dB Optical WDR (Wide Dynamic Range)
- Built-in Mic & Speaker
- Smart IR, Up to 50 m (164 ft) IR distance
- 10m (33 ft) warm -light distance
- Micro SD, up to 256GB
- IP66 protection
- DC12V or PoE (IEEE 802.3af) power supply
- LightHunter



IPC94144SX25

PTZ IP Lente Dual 4MP+4MP 25X 4.8-120mm IPC94144SR-X25-F40C

CARACTERÍSTICAS:

- PTZ Dual lens Panorama 4MP + PTZ lens 4MP
- High quality image with 4MP,1/2.7" CMOS sensor
- Ultra 265, H.265, H.264, MJPEG
- Panorama IR 30m, PTZ lens up to 100m IR
- WDR 120dB
- 25X optical zoom
- DC12V or PoE+ (IEEE 802.3at) power supply
- Alarm 2 in and 1 out, Audio 1 in and 1 out
- Micro SD, up to 256 GB

IPC815SB-ADF14K-IO

Cámara IP Fisheye 5MP 1.4MM IPC815SB-ADF14K-IO

CARACTERÍSTICAS:

- High quality image with 5MP, 1/2.8" CMOS sensor
- Ultra 265, H.265, H.264, MJPEG
- Smart IR, up to 10m (33ft) IR distance
- Supports 256 G Micro SD card
- IK10 vandal resistant
- IP66 protection
- Support PoE power supply



NVR30104S3P4

NVR 4 canales PoE 1 HDD VGA/HDMI 64MBPS NVR301-04S3-P4

CARACTERÍSTICAS:

- Support Ultra 265/H.265/H.264 video formats
- 4 channel input
- Support 1-ch HDMI, 1-ch VGA, HDMI at up to 4K(3840x2160) resolution
- HDMI and VGA simultaneous output
- Up to 4K resolution recording
- 1 SATA HDDs, up to 8TB



NVR30108S3P8

NVR 8 canales PoE 1 HDD VGA/HDMI 64MBPS NVR301-08S3-P8



CARACTERÍSTICAS:

- Support Ultra 265/H.265/H.264 video formats
- 8 channel input
- Support 1-ch HDMI, 1-ch VGA, HDMI at up to 4K (3840x2160) resolution
- HDMI and VGA simultaneous output
- Up to 4K resolution recording

NVR301-16X-P8

6-ch 1-SATA Ultra 265/H.265/H.264 NVR301-16X-P8


CARACTERÍSTICAS:

- Support Ultra 265/H.265/H.264 video formats
- 16-channel input
- Plug & Play with 8 independent PoE network interfaces
- Support 1-ch HDMI, 1-ch VGA, HDMI at up to 4K (3840x2160) resolution
- HDMI and VGA simultaneous output
- Up to 8MP resolution recording
- 1 SATA HDD up to 6TB



NVR302-16E2

NVR 16 Canales 2HDD VGA/DHMI 320MBPS NVR302-16E2



CARACTERÍSTICAS:

- Support 1-ch HDMI, 1-ch VGA. HDMI up to 4K (3840x2160) resolution
- HDMI and VGA independent outputs provided
- Up to 12 Megapixels resolution recording
- 2 SATA HDDs, Up to 8TB for each HDD
- Support Ultra H.265/H.265/H.264 video formats

NVR302-16S-P16

NVR 16 Canales PoE 2HDD VGA/HDMI 160MBPS NVR302-16S-P16



CARACTERÍSTICAS:

- Support Ultra265/H.265/H.264 video formats
- Support HDMI and VGA simultaneous output
- Up to 8 Megapixels resolution recording
- 2 SATA HDDs, up to 10TB for each HDD
- 8 RJ-45 10M/100M self-adaptive Ethernet Interfacev

NVR302-32E2

NVR 32 Canales 2HDD VGA/DHMI 320MBPS NVR302-32E2



CARACTERÍSTICAS:

- Support 1-ch HDMI, 1-ch VGA. HDMI up to 4K (3840x2160) resolution
- HDMI and VGA independent outputs provided
- Up to 12 Megapixels resolution recording
- 2 SATA HDDs, Up to 8TB for each HDD
- Support Ultra H.265/H.265/H.264 video formats

NVR304-32E2-P16

NVRv 32 Canales 16 PoE 4HDD VGA/HDMI 320MBPS NVR304-32E2-P16



CARACTERÍSTICAS:

- HDMI and VGA independent outputs provided
- Support 1-ch HDMI, 1-ch VGA. HDMI up to 4K (3840x2160) resolution
- Up to 12 Megapixels resolution recording
- 4 SATA HDDs, Up to 10TB for each HDD
- Support RAID 1, 5
- Various fisheye dewarping modes for live view and playback for both web interface and GUI

NVR308-64X

NVR 64 Canales 8HDD VGA/DHMI 384MBPS NVR308-64X



CARACTERÍSTICAS:


- Support 2-ch HDMI, 1-ch VGA. HDMI1 and HDMI2 up to 4K (3840x2160) resolution
- HDMI1, HDMI2, VGA independent outputs provided
- Up to 12 Megapixels resolution recording
- Support RAID 0, 1, 5, 6, 10
- 8 SATA HDDs, Up to 10TB for each HDD
- 1 eSATA port

KITNVR4IPC212

Kit de cámaras Wi-Fi KIT/NVR301-04LS3-W/4 IPC212LB

CARACTERÍSTICAS:

- Embedded WiFi Module with highperformance and high stability
 - Support CCMP encryption and WPA2-PSK authentication, Support IP cameras with WiFi in access
 - Support Ultra 265/H.265/H.264 video formats
 - 4-channel input
- High quality image with 2MP, 1/2.9" CMOS sensor
 2MP (1920*1080) @30/25fps; 720P (1280*720) @30/25fps
 Ultra 265, H.265, H.264, MJPEG
 Built-in Mic

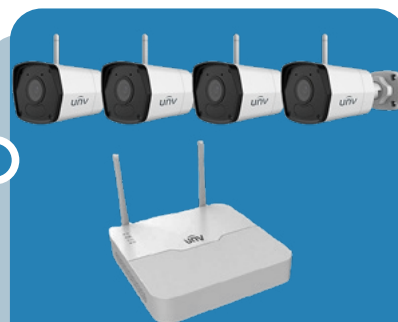


KITNVR4IPC322

Kit de cámaras Wi-Fi KIT/NVR301-04LS3-W/IPC322LB-AF28WK-G

CARACTERÍSTICAS:

- Embedded WiFi Module with highperformance and high stability
 - Support CCMP encryption and WPA2-PSK authentication, Support IP cameras with WiFi in access
 - Support Ultra 265/H.265/H.264 video formats
 - 4-channel input
- High quality image with 2MP, 1/2.9" CMOS sensor
 2MP (1920*1080) @30/25fps; 720P (1280*720) @30/25fps
 Ultra 265, H.265, H.264, MJPEG
 Built-in Mic

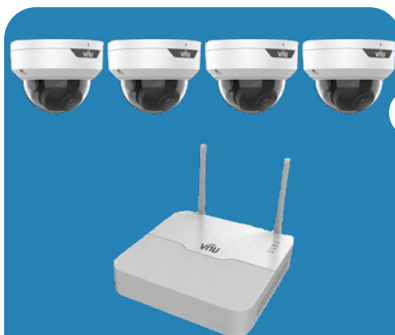



MW3222-V

Monitor 22" 24/7 HDMI, VGA 1920x1080 MW3222-V

CARACTERÍSTICAS:

- True color display
- Resolution is up to at 1920x1080
- Wide view of field:170°(H)/ 160°(V)
- Specific menu design, which is simple to operate
- Support 7*24 working and lower power consumption
- Adaptively recognize signal
- VESA stand bracket
- Support multiply language

MW3222-V-DT

Monitor 22" 24/7 HDMI, VGA 1920x1080 MW3222-V-DT

CARACTERÍSTICAS:

- True color display
- Resolution is up to at 1920x1080
- Wide view of field:170°(H)/ 160°(V)
- Specific menu design, which is simple to operate
- Support 7*24 working and lower power consumption
- Adaptively recognize signal
- VESA stand bracket
- Support multiply language



MW3232-V-K

Monitor 32" 24/7 HDMI, VGA 1920x1080 MW3232-V-K

CARACTERÍSTICAS:

- Shield design effectively prevents electromagnetic radiation.
- New color management module delivers true-to-life colors.
- Automatic detection of signal cable connection.
- Stable structural design
- Low power consumption, and long lifetime.
- Easy pedestal assembly/disassembly.
- Flexible wall mount and pedestal mount, saving space.



NSW20106POE

Switch PoE 4P+2 10/100 65W 250M NSW2010-6T-POE-IN

CARACTERÍSTICAS:

- Multiple working modes to address your business needs: Default (Normal mode), VLAN (Secure mode), EXTEND (Surveillance mode)
- Support port traffic control
- Support for secure mode, all downlink ports can communicate only with uplink ports
- Up to 250m transmission distance on surveillance mode
- Support buffer optimization
- All metal housing, safe and reliable

NSW201010POE

Switch PoE 8P+2 10/100 120W 250M NSW2010-10T-POE-IN

CARACTERÍSTICAS:

- Multiple working modes to address your business needs: Default (Normal mode), VLAN (Secure mode), EXTEND (Surveillance mode)
- Support port traffic control
- Support for secure mode, all downlink ports can communicate only with uplink ports
- Up to 250m transmission distance on surveillance mode
- Support buffer optimization
- All metal housing, safe and reliable



NSW201016POE

Switch PoE 16P+2 10/100 250W 250M NSW2010-16T2GC-POE-IN

CARACTERÍSTICAS:

- Multiple working modes to address your business needs: Default (Normal mode), VLAN (Secure mode), EXTEND (Surveillance mode)
- Support port traffic control
- Support for secure mode, all downlink ports can communicate only with uplink ports
- Up to 250m transmission distance on surveillance mode
- Support buffer optimization
- All metal housing, safe and reliable



Carving a colorful world

When color meets more...



**ColorHunter +
Varifocal**



**ColorHunter +
Dual lens**



**ColorHunter +
4K 1/1.2" sensor**



HDD1TB

Disco duro 1TB Western Digital Purple WD10PURX

CARACTERÍSTICAS:

- Capacidad: 1 TB
 - Interfaz: SATA
 - Factor de forma: 3.5 Inch
 - Disk Speed (RPM): 5400rpm
- Compatibilidad: Los discos de almacenamiento para videovigilancia WD Purple™ 24 horas, todos los días.
Dimensiones (largo, ancho y alto): 5.79" x 4" x 1.03"

HDD2TB

Disco duro 2TB Western Digital Purple WD20PURX

CARACTERÍSTICAS:

- Capacidad: 2 TB
 - Interfaz: SATA
 - Factor de forma: 3.5 Inch
 - Disk Speed (RPM): 5400rpm
- Compatibilidad: Los discos de almacenamiento para videovigilancia WD Purple™ 24 horas, todos los días.
Dimensiones (largo, ancho y alto): 5.79" x 4" x 1.03"



WD10PURZ

Disco duro 1TB Western Digital Purple WD10PURZ-85U8XYO

CARACTERÍSTICAS:

- Capacity: 1TB
- Disc Bay: 3.5"
- Speed: 5400 RPM
- Interface: SATA 3 Gb/s
- Cache: Cache 256MB



WD22PURZ

Disco duro 2TB Western Digital Purple WD22PURZ-85B4ZY0

CARACTERÍSTICAS:

- Capacity: 1TB
- Disc Bay: 3.5"
- Speed: 5400 RPM
- Interface: SATA 3 Gb/s
- Cache: Cache 256MB

WD42PURU

Disco duro 4TB Western Digital Purple WD42PURU-64C4CY0

CARACTERÍSTICAS:

- Capacidad: 2 TB
- Interfaz: SATA
- Factor de forma: 3.5 Inch
- Disk Speed (RPM): 5400rpm

Compatibilidad: Los discos de almacenamiento para videovigilancia WD Purple™ 24 horas, todos los días.
Dimensiones (largo, ancho y alto): 5.79" x 4" x 1.03"



WD63PURU

Disco duro 6TB Western Digital Purple WD63PURU

CARACTERÍSTICAS:


- Rotational Speed 5400 RPM
- Data Transfer Rate1
- Buffer to Host 6 Gb/s maximum
- Host to/from Drive Up to 180 MB/s sustained
- Buffer Size 256 MB
- Error Rate - Unrecoverable <1 in 1014 bits read
- Spindle Start Time 12s average

WD84PURU

Disco duro 8TB Western Digital Purple WD84PURU

CARACTERÍSTICAS:

- Purple 8TB Surveillance
- Hard Drive Disk 3.5" SATAIII
- Purple™ 6Gb/s
- 128MB
- IntelliPower™
- 5400 RPM



WD101PURA

Disco duro 10TB Western Digital Purple WD101PURA

CARACTERÍSTICAS:

- Purple 10TB Surveillance
- SATA interface
- Factor de forma 3.5 Inch
- Disk Speed (RPM) 7200rpm
- Load/Unload Cycles 300,000



CAB5-UNV

Cable UTP Cat.5E 305 AWG24 Rohs/REACH Gris CAB-LC2100B-E-IN

CARACTERÍSTICAS:

- Material OFC (Oxygen free copper)
- PVC (complies RoHS/REACH)
- AWG 24
- Packing length 305±1 m
- Rip-cord Yes
- Ambient temperature -20°C - 60°C

CAB-LC3100A-E-IN

Cable UTP Cat.6 305 AWG24 Rohs/REACH Gris CAB-LC3100A-E-IN


CARACTERÍSTICAS:

- Material OFC (Oxygen free copper)
- PVC (complies RoHS/REACH)
- AWG 24
- Packing length 305±1 m
- Rip-cord Yes
- Ambient temperature -20°C - 60°C



HB-5032-H

SOPORTE BASE P/ESCRITORIO P/TV 32 PULG. UNV HB-5032-H



CARACTERÍSTICAS:


- Product dimensions (W×H×D) (mm) 436.02*368.41*268.26
- Package dimensions (W×H×D) (mm) 490 × 130 × 320
- Weight (kg) Net weight: 1.05
- Gross weight: 1.7
- Material SGCC

HB4032E

Soporte para monitor de 32" a 55" HB-4032-E

CARACTERÍSTICAS:

- Dimensiones: 440mm x 425mm x 47mm (W x H x D)
- Peso: 1.4 Kg
- Material: SGCC
- Estándar: VESA-2-Axis

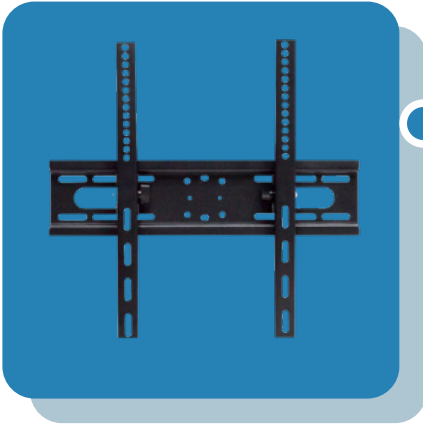

TR-UPO6-B-IN

Adaptador de montaje en poste

CARACTERÍSTICAS:

- Application Outdoor, pole or rail installation for bullet camera of IPC22X, IPC24X and IPCB1XX series*
- Dimensions 99 x 90 x 38mm (3.90" x 3.54" x 1.50")*
- Embrace hoop diameter 67 ~ 127mm (2.64" ~ 5.00")*
- Weight 0.2kg (0.44lb)*
- Material Aluminum, Stainless steel*




TR-WE45-A-IN

Soporte de pared domo PTZ

CARACTERÍSTICAS:

- Application Indoor or outdoor, wall installation for PTZ dome camera*
- Dimensions(L x W x H) 216mmx141mmx314mm(8.5" x 5.6"x 12.4")*
- Weight 1.0kg(2.2lb)*
- Material Aluminum alloy*





TR-JB07-D-IN

Caja Plexo 125mm*125mm*55mm TR-JB07-D-IN

CARACTERÍSTICAS:

Dimensions 125mm*125mm*55mm (4.92" x4.92"x2.17")

Weight 0.75kg(1.65lb)

Material Aluminum alloy

