imou

Full Color

IPC-S41FA

4MP P&T PoE Camera

S41FA delivers 4MP live monitoring with a choice of 3.6mm/6mm lens option, With 4MP QHD live monitoring and 0~355° pan & 0~90° tilt features, S41FA ensures every corner of your home completely covered. It supports four night vision modes for clear-as day clarity even in pitch dark. With IP66 certified, the camera can be used outdoors under different weather conditions. With built-in spotlight , S41FA actively keeps unwelcome visitors away from what you care about.

H.265 4MP QHD
More details presented than 1080p

Human Detection
Quickly find human targets in you home

Smart Color Night Vision
Support four-mode night vision for clear-as day clarity even in pitch dark

Active Deterrence
Scare away unwelcome visitors with built-in spotlight

IP66
Weatherproof from dust and water

Built-in Microphone
High quality microphone picks up sounds clearly while monitoring

Diversified Storage
Supports NVR, Cloud Storage or Micro SD card (up to 256GB)

Alarm Notification
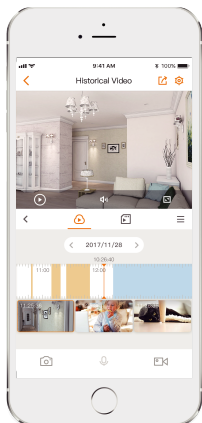Sends instant motion-activated alerts to your mobile phone

Smart Tracking
Automatically tracks moving objects

PoE
An Ethernet cable provide both data connection and electric power.

Stay close with what you care

With Cloud service, you will have access to what you care as long as Internet is available. You can record daily or motion videos on Cloud and play back anytime anywhere.

Specifications

Camera
1/3" 4 Megapixel Progressive CMOS
4MP(2560 x 1440)
Night Vision: 30m(98ft) Distance
3.6mm/6mm Fixed Lens
Field of View: 3.6mm: 79°(H), 44°(V), 94°(D)
　　　　　　　6mm: 48°(H), 28°(V), 56°(D)
355° Pan & 0~90° Tilt

Video & Audio
Video Compression : H.265/H.264
Up to 25/30fps fps Frame Rate
16x Digital Zoom
Built-in Mic

Notice Management
Motion Detection
Configurable Region
Human Detection

Network
1 x 100Mbps Ethernet Port
Imou App: iOS, Android
ONVIF

Auxiliary Interface
Micro SD Card Slot (up to 256GB)
Built-in Mic
Reset Button

General
DC 12V1A Power Supply
Power Consumption:<6.2W
Material: Plastic
Working Environment:-20°C~+50°C, Less Than 95%RH
Dimensions: 120.7 × 136.2× 183.3mm (4.75× 5.36× 7.22inch)
Weight: 390g (0.86lb)
CE, FCC
IP66

What's in the box

- 1x Camera
- 1x Quick Start Guide

- 1x Mounting Template
- 1x Mounting Bracket
- 1x Waterproof Connector
- 1x Screw and Anchor pack